Snappi Pushchair

USER MANUAL

This manual covers:

Size 1 and 2 Snappi Pushchair

IMPORTANT
Please read these instructions carefully
Before using the Snappi System

Fig 0.1 Complete Pushchair (size 1 shown)

Fig 0.2 Chassis (size 1 shown)

Fig 0.3 Seat Unit (Size 1 shown)

Fig 0.4 Folded System - Complete (size 1 only)

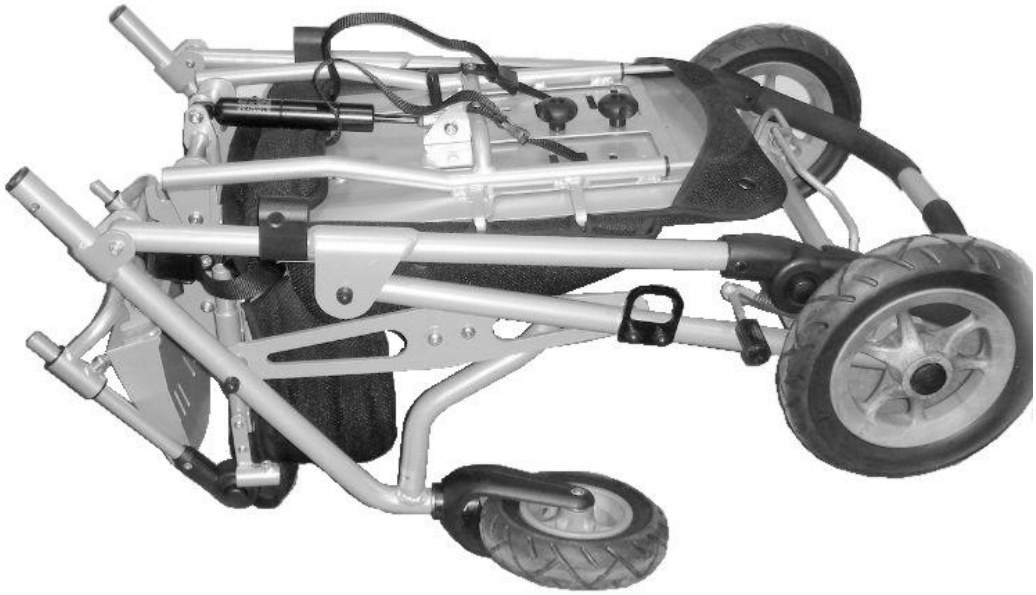

Fig 0.5 Folded System - 2 part fold (all models)

Item	Description	Page
1	Who to contact if you have difficulty	7
2	Introduction	7 - 9
3	Unpacking	9 - 10
4	Preparing the wheelbase for use	10
	4.1.1 Unfolding the Frame (Original Locks)	11 - 12
	4.1.2 Unfolding the Frame (Spring Loaded Locks)	12 - 13
	4.2 Brakes	13
	4.3 Fitting the seat to the chassis	14 - 16
	4.4 Using the Tilt In Space facility	17
	4.5 Folding as a complete system (size 1 only)	18
	4.6 Folding as a 2 part system (all models)	18
5	Setting up the seat unit	19
	5.1 Adjusting the seat unit	20
	5.1.1 Seat Depth and Hip Guides	20
	5.1.2 Footrest Depth and Knee Angle Adjustment	21
	5.1.3 Back height and recline angle adjustment	22
	5.1.4 Lateral Supports (Optional)	23 - 24
	5.2 Fitting and removing the cover	24 - 25
	5.3 Fitting a Headrest Pad or Lateral Head Supports (optional)	25 - 26
	5.4 Fitting the Pelvic Strap	27 – 28
	5.5 Fitting a Groin Adaptation Strap	29
	5.6 Fitting a Butterfly/Chest Harness	30 - 33
6	Accessories	34
	6.1 Shopping Basket	34
	6.2 Equipment Carrying Tray	35
	6.3 Sun Canopy	36 - 37
	6.4 Rain Cover	38
	6.5 Frame Padding	39
	6.6 Grip Rail	39
	6.7 Playtray	40-41
	6.8 Pommel	42
7	User Instructions	43
	7.1 Getting into the Snappi Pushchair	43
	7.2 Getting out of the Snappi Pushchair	43
8	Attendant pushing	43

	8.1 Pushing	43 - 44
	8.2 Brakes	44
	8.3 Comfort	44
	8.4 Lifting and general safety	45
9	Cleaning	45
	9.1 Buggy and seat unit	45
	9.2 Seat Cover	45
	9.3 Pelvic strap & harnessing	45
10	Maintenance	45
	10.1 Routine maintenance	45 - 46
	10.2 Six-monthly maintenance	46
11	Oxygen Cylinder	47
12	Warranty	47
13	Transporting the Wheelbase	48
	13.1 Preparing the system for transport	48
	13.2 Attaching wheelbase to vehicle	48 - 49
14	Repairs	50

1: Who to contact in difficulty

Tendercare Ltd.
PO BOX 3091, Littlehampton, BN16 2WF
Tel: (01903) 726161 Fax: (01903) 734083
Email: info@tendercareltd.com
Web: www.tendercareltd.com

2: Introduction

The Snappi is a highly adjustable pushchair designed to accommodate a wide variety of special seating needs. The pushchair system comprises a wheelbase and a seating unit, which is easily removable for storage and transport thanks to its integrated interface. The system is available in 2 sizes.

The **Wheelbase** is made of a strong and lightweight aluminium alloy, minimising weight and providing a very rugged frame. The wheelbase provides a tilt in space facility and has 2 fixed rear wheels and 2 castor wheels at the front for easy steering.

The **Seat** unit offers best in class growth, thanks to its versatile design and large ranges of adjustments to all supports. It has an easy to remove, breathable cover, and comes supplied with a hip belt as standard.

Seat adjustments (please see table below for details of adjustment ranges): Seat depth adjustment, depth and length adjustable Hip Guides, Back Height adjustment, Independent back recline (using an easy to operate gas strut mechanism) and depth & angle adjustable Footrest. The seat also includes an interface allowing it to be quickly fitted and removed from the wheelbase, and like the entire Snappi range, includes all the latest safety mechanisms (including an innovative 2 stage release to prevent little fingers causing accidents).

The following accessories for use with the Snappi Pushchair are available from Tendercare Ltd.

Wheelbase Accessories: Equipment carrying tray, Shopping basket, and Rain-hood.

Seat Accessories: Height and width adjustable wrap around Lateral Supports, Butterfly chest harness, Foot and Toe Straps, Pommel, Play Tray, Lateral Head Supports, Standard Headrest, Extra recess Headrest, and Occipital roll Headrest.

These instructions apply to all sizes.

Snappi Seat Adjustments

Support	Snappi Pushchair Size 1	Snappi Pushchair Size 2
Seat Depth	195-295mm	290-390mm
Seat Width	190-290mm	250-350mm
Backrest Height	450-620mm	540-700mm
Footrest Depth	150-280mm	215-360mm
Back Recline Angle	90°- 135°	90°- 135°
Knee Angle*	-15°- 90°	-15°- 90°
Total System Weight	19Kg	22Kg
Maximum Carry Weight	35Kg	40Kg

IMPORTANT:

**** Knee angle adjustable in 15°increments***

***** Maximum carry weight includes the occupant and all accessories.***

Dimensions (mm)	Snappi Pushchair (Open)	
	Size 1	Size 2
A	944	960
B	571	684
C	992	998

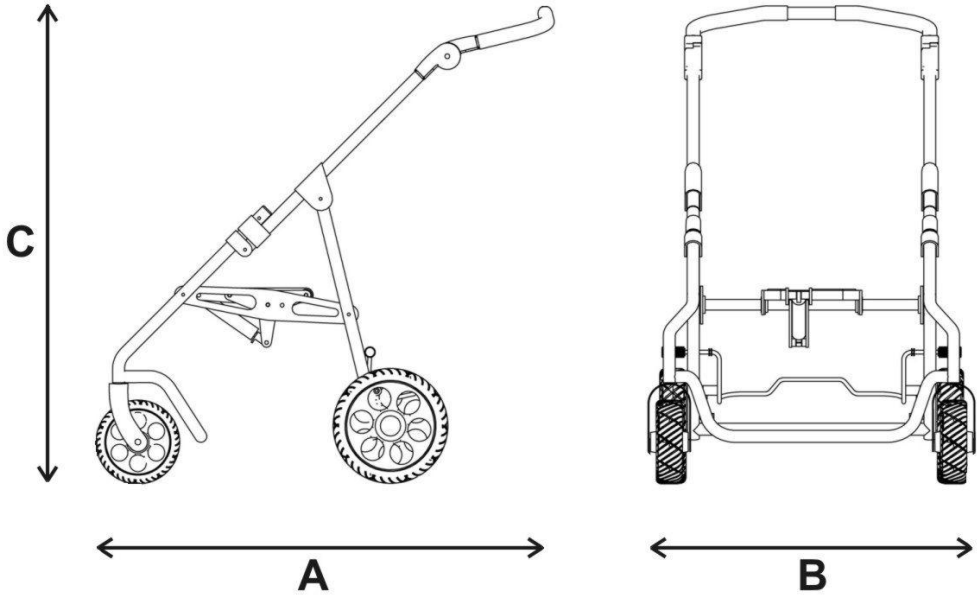

Dimensions (mm)	Snappi Wheelbase Folded	
	Size 1	Size 2
A	771	798
B	571	684
C	573	560

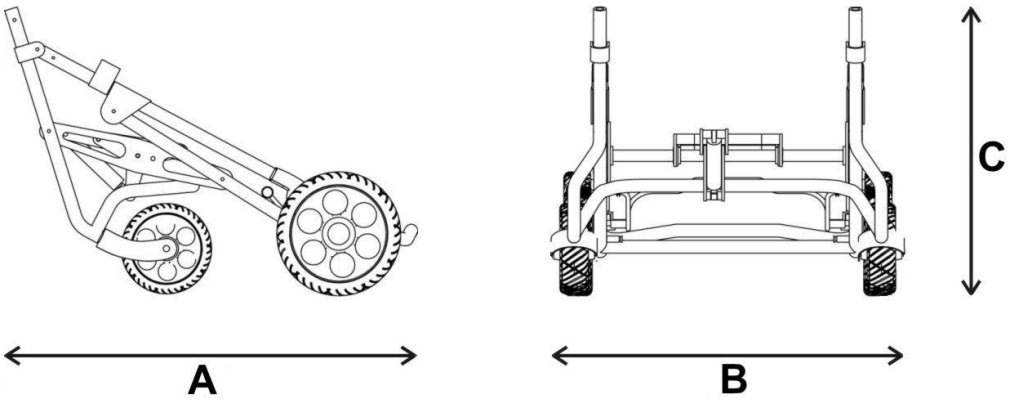

Please note sizes for complete pushchair are not given, as overall size of pushchair is dependant on the specific settings of the seat.

All sizes and weights are given as a guide. Tendercare ltd reserves the right to amend specifications at any time as part of their product development programme.

3: Unpacking

The wheelbases and seat unit are delivered together in a cardboard carton. This measures 680mm wide x 480mm deep x 1030mm high and weighs approximately 18Kg (size 1) or 20Kg (size 2).

WARNING:
The transit carton is quite bulky so moving and unpacking must be done with care. Observe all lifting and handling regulations.

Stand the carton upright making sure it is supported and cannot fall over. Open the carton and remove any packages or packing, which could obstruct the removal of the seat and wheelbase. Remove the seat first, then the wheelbase. Do not attempt to lift both parts out together.

The carton should contain the following items:

Item	Component	QTY.	Yes	No
1	Size 1 or 2 Wheelbase	1		
2	Size 1 or 2 Seat Unit	1		
3	User Manual	1		
4	5mm Alan key	1		

The following items should be fitted to the seat as standard:

Item	Component	QTY.	Yes	No
5	Hip guide covers	2		
6	Seat Base Cover	1		
7	Seat Back Cover	1		
8	Side Pads	2		
9	Hip Belt	1		

Please note, accessories such as lateral supports or harnessing that were ordered at the same time as the pushchair will be included in the main package.

Larger accessories will be packaged in separate cartons (e.g. the rain cover).

IMPORTANT:

- ***If any items are damaged or missing, then please contact Tendercare, preferably by email at info@tendercareltd.com or alternatively please call us on (01903) 726161 within 36 hours of delivery.***

After unpacking and checking you have all components and they are in good condition dispose of the packaging at your local recycling centre. Alternatively retain and reuse.

4: Preparing the wheelbase for use

WARNING:
When opening or folding the wheelbase, ensure that you hold the frame so that you avoid any danger of catching your fingers in moving parts.

Keep children clear of the wheelbase during opening and folding.

4.1.1 Unfolding the Frame (original locks)

Standing at back of the wheelbase, place your foot on the rear cross member X (see Fig 4.1.1.1) and lift handle labelled Y as far as it will move.

This will open the frame.

Fig 4.1.1.1

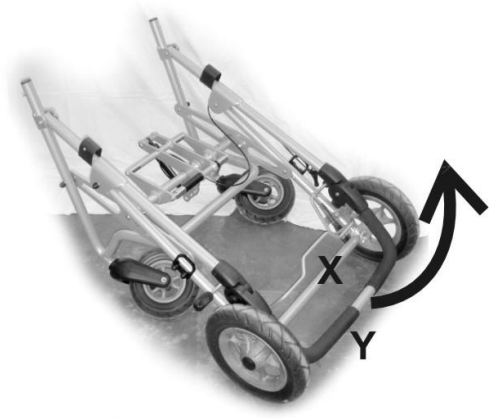

Fig 4.1.1.2

Next locate the 2 plastic locking sliders (See Fig 4.1.1.2). These will be stowed in the “open” position and are held in place by 2 small spring clips.

Press the 2 silver “Spring pins” in and slide the 2 locking pieces down over the lower tube sections. (See Fig 4.1.1.3)

Fig 4.1.1.3

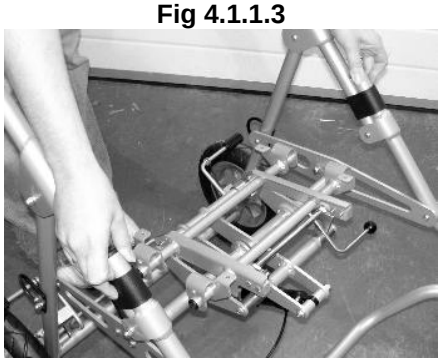

Fig 4.1.1.4

The pins will spring through the holes in the sliders and hold them in place (see Fig 4.1.1.4).

WARNING:
If the locking sliders are not in the correct position, or the spring pins do not protrude thereby allowing the locking clips to move back up the frame, then the frame may collapse in use.

Folding the wheelbase: To unlock the frame and fold the wheelbase, reverse the above instructions.

4.1.2 Unfolding the Frame (Spring loaded locks)

Fig 4.1.2.1

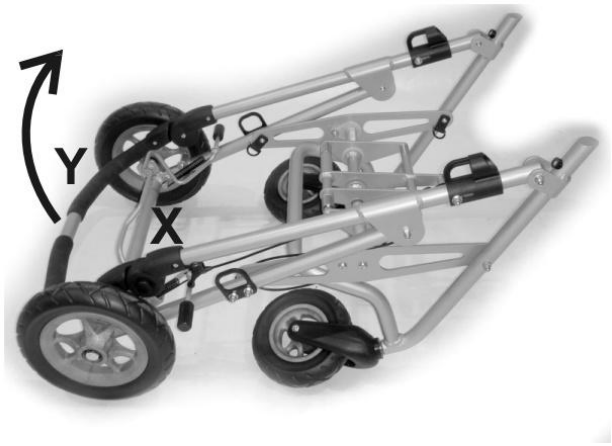

Standing at back of the wheelbase, place your foot on the rear cross member X (see Fig 4.1.2.1) and lift handle labelled Y as far as it will move.

This will open the frame.

Fig 4.1.2.2

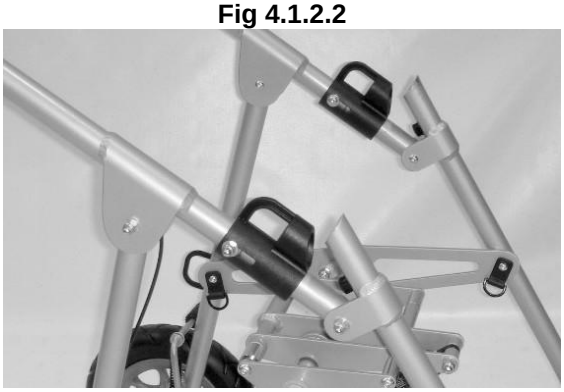

Once the frame is almost open, the 2 plastic frame locks will engage with the angled sections of the lower frame.

Continue to unfold the frame; this will force the locks up the tubes. There will be some resistance, as you will be working against the locking springs.

Fig 4.1.2.3

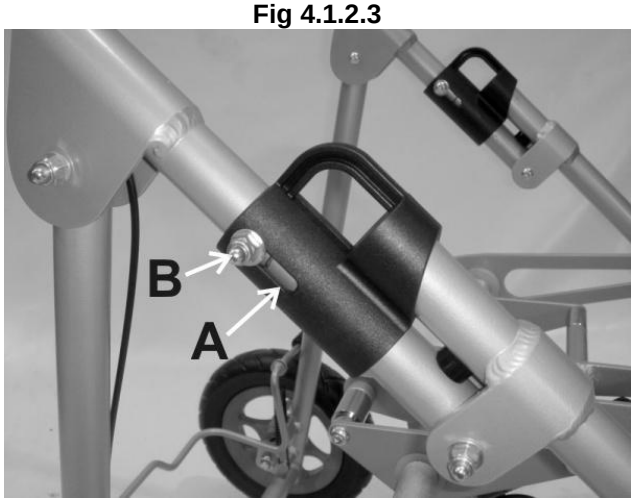

Once fully open, the frame locks will snap shut over the front frame, securing the frame in the open position.

Always check that both locks are fully closed. In the locked position the guide bolt '**B**' will be sat in the top of the slot '**A**' on the side of the slider as shown (see Fig 4.1.2.3). If there is any slot visible above the guide bolt, push the lock down by hand until it will not move any further.

Fig 4.1.2.4

To fold the frame:

Standing beside the frame, pull up the 2 locking sliders as shown (see Fig 4.1.2.4).

Whilst holding the locks open, push down with your arm on the upper frame or push handle, so that the frame starts to fold.

Release the locking sliders, and fold down the frame by moving the push handle down as far as it will move.

IMPORTANT:
Always check that BOTH frame locks are fully closed before using the frame. If they are not properly engaged, the frame could collapse during use.

4.2 Brakes

Fig 4.2.1

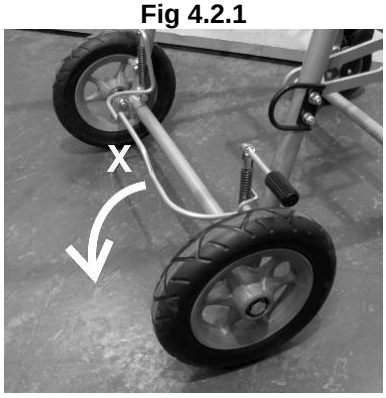

To apply the brake, put your foot on the top of brake bar (labelled X) and push down as shown. The brake will flip down onto the wheels and lock them.

To release the brake, hook your foot between the middle raised portion of the brake bar, and the frame cross bar. Then, lift the brake bar with your foot until it flips back and stops against the brake stop pins. Please note you may find it easier to use your hand to release the brake.

Fig 4.2.2

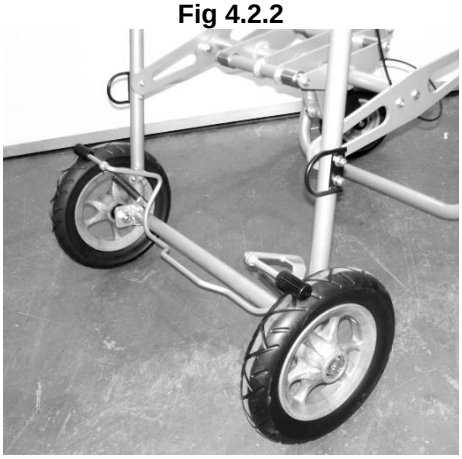

Important:
Always put the brake on when placing the child in, or taking them out of the pushchair. Do not leave the brake on when the pushchair is not in use as this will damage the rear wheels.

WARNING:
The brake mechanism is spring loaded so care must be taken when operating it.

4.3 Fitting the seat to the chassis

The seat incorporates an Interface system, and includes a 2-stage latch that comprises a main latch and a second safety latch that prevents accidental release of the seat from the chassis.

The safety catch must be correctly set before the main catch can be operated:

How to operate the safety catch:

Fig 4.3.1

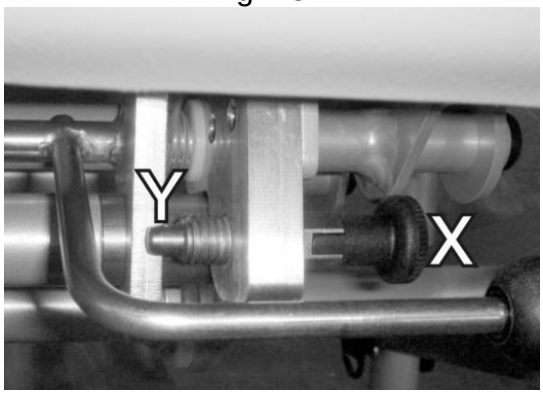

Safety Catch Locked

The safety catch clip is located under the front right corner of the seat near to the release lever.

Definition of components:

X: Pull handle

Y: Locking Pin

To release it, pull the handle “X”, and turn it 90 degrees so that the pin “Y” is fully retracted.

To lock it, pull “X” and turn 90 degrees in the opposite direction, so that pin “Y” is fully protruded and sits behind the interface main catch “B” (see fig 4.3.3 on next page).

Fig 4.3.2

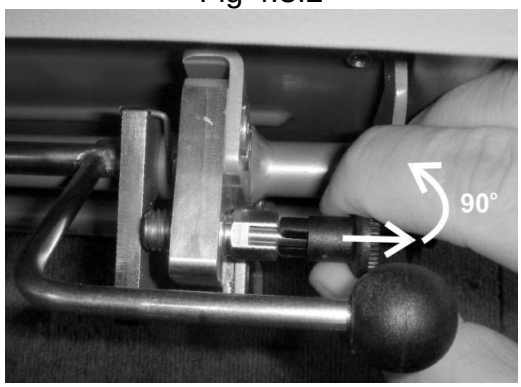

Safety Catch unlocked

Important:
When fitting or removing the seat, the carer / parent must first ensure that the safety catch pin is set in the “unlocked” position. It will not be possible to fit or remove the seat if the latch is “locked”, and attempting to do so may cause damage to the chassis or the seat.

Once the seat has been fitted, the carer / parent must always lock the safety catch.

Note:
A warning label is positioned on the front right hand portion of the tilt frame on the chassis, to remind carers to lock the safety catch.

To fit the seat to the frame:

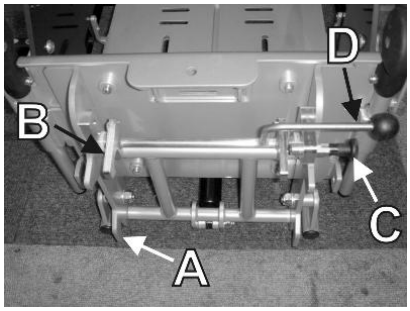

Fig 4.3.3

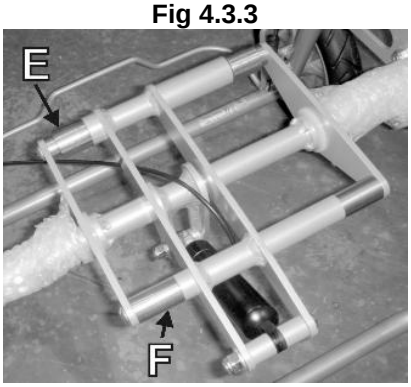

Fig 4.3.4

Definition of interface mounting points:

A: Seat Interface Rear Hooks

B: Seat Interface Main Clips

C: Seat Interface Safety Catch

D: Seat Interface Release Handle

E: Frame interface rear bushings

F: Frame interface front bushings

Ensure that the safety catch “C” has been unlocked (see instructions on previous page).

Holding the seat as shown, tilt it back and locate the 2 rear hooks “A” on the back of the interface, over the stainless steel bushings on the back of the frame interface “E”.

Fig 4.3.5

Fig 4.3.6

Next, rotate the seat forward and down so that the main clips “B” snap over the front stainless steel bushes on the frame interface “F”.

Note that due to the design of the frame interface, it is not possible to fit the seat backwards. If fitted the wrong way around the clips will not close and it will not sit down into the frame.

Fig 4.3.7

Next, push down firmly on the release lever “D” to ensure that the clips are fully closed. Note the lever is positioned under the front right corner of the seat (see Fig 4.3.7).

Set the safety catch “C” to the “Locked” position (so that the pin sits behind the interface clip).

Fig 4.3.8

To remove the seat, first unlock the safety catch “C” as detailed above.

Lift the release lever “D” up, whilst holding the top of the seat with your other hand. This will open the main clips “B”. Rotate the seat back so that the main clips are clear from the frame, and lift the seat away from the buggy.

IMPORTANT:

- ***Always ensure that the seat interface clips are fully closed. To test this, press down on the release lever when fitted and make sure the clips will not move (see fig 4.3.5).***
- ***Always lock the safety catch before using the buggy.***
- ***Always unlock the safety catch before fitting or removing the seat. Attempting to fit or remove the seat with the catch locked could cause damage to the seat or the chassis.***
- ***Do not attempt to fit the seat backwards. It will not lock in a rearward facing position.***
- ***The seat interface system is spring loaded, so ensure your fingers are clear of the clips when fitting or removing.***

4.4 Using the Tilt in Space facility

Fig 4.4.1

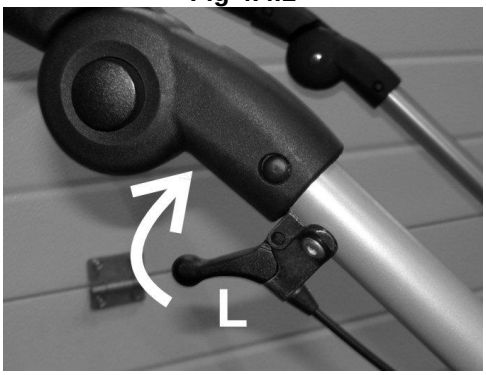

To operate the tilt in space mechanism, place your hand over the push handle adjustor, and lift the lever 'L' (see Fig 4.4.1) as shown.

Fig 4.4.2

This will open the gas strut and tilt the seat. Note; The speed of tilt can be controlled by varying the pressure applied at lever L.

Use your other hand to support seat as it tilts.

Fig 4.4.3

To reset the tilt mechanism, hold down lever L and push down firmly on the front of the seat as shown (see Fig 4.4.3). Once in the desired position, release lever L. For a 90-degree position, move the seat so the gas strut is fully closed and it will not move any further before releasing the tilt lever.

IMPORTANT:

- ***Always ensure any harness provided for the child is used and correctly adjusted before reclining or returning the seat to a more upright position.***
- ***Always support the seat when tilting, as the gas springs can be quick to operate. If the seat is not supported, is may move swiftly and could cause the occupant distress.***

4.5 Folding as a complete system (size 1 only) – Not suitable for rearward facing model

First, set the seat to full tilt in space as detailed in section 4.4

Next fold the chassis as described in section 4.1 without removing the seat.

Fig 4.5.1

Fig 4.5.2

Next, set the seat back angle to its maximum position as shown (see instruction on section 5.1.3).

Finally, fold the footrest, and tuck it in using the knee angle adjustors as shown (see section 5.1.2 for details).

Fig 4.5.3

4.6 Folding as a 2 part system (all models) – Including rearward facing model

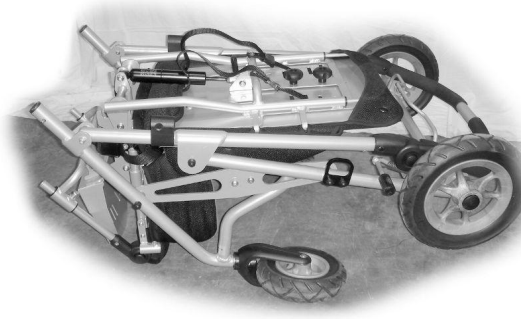

Fig 4.6.1

To fold the system as a 2 part, first set the seat back angle to 90^{o} (see section 5.1.3), remove the seat and fold the frame as detailed in section 4.1.

Next place the seat, face down over the folded chassis as shown.

Finally, fold the footrest tray and angle the footrest tubes to sit closer to the seat (see section 5.1.2 for how to adjust and fold the footrest).

5.0 Setting up the seat unit

When setting up the seat unit always ensure the following is done:

- Always consult your Therapist or Rehabilitation Engineer for advice.
- Ensure that the child is relaxed and happy and if possible in an environment in which they are familiar.
- If possible, sit the child on a plinth to take the measurements listed below:

Measurement	Number (see fig 5.0.1)	Millimetres
Top of head to seat	1	
Under armpit to seat (Axilla height)	2	
Actual sitting depth	3	
Chest Width (Arm pit to arm pit)	4	
Hip width	5	
Leg drop	6	

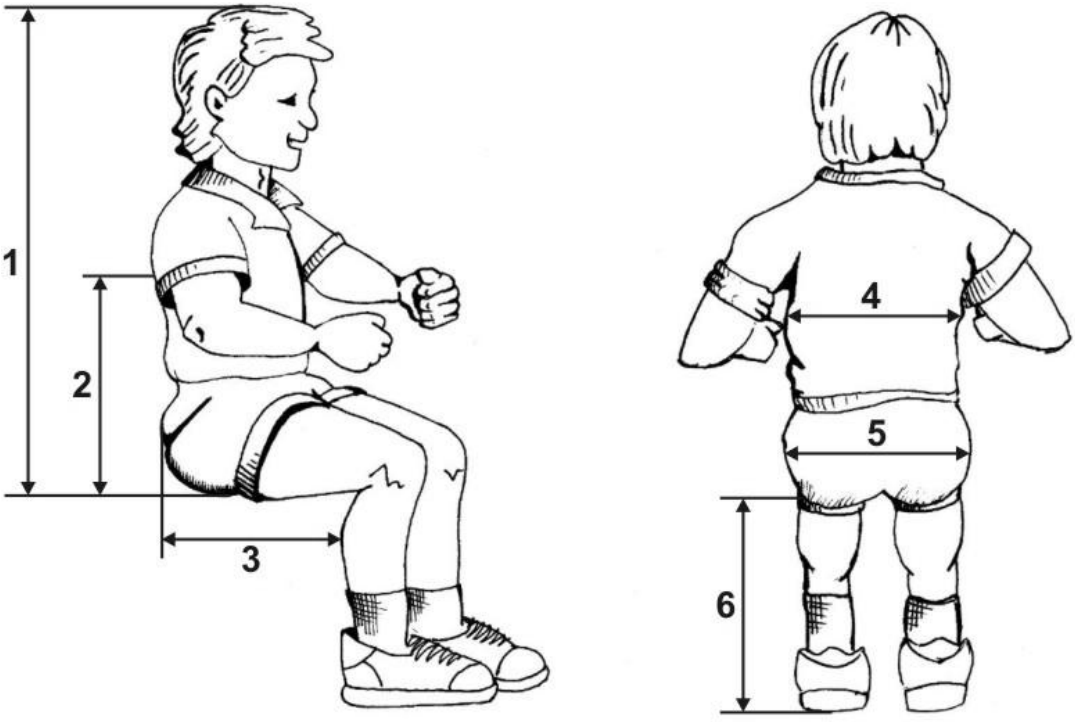

Fig 5.0.1 Definition of measurements

Note: you can now adjust the seat to suit your child's dimensions

5.1 Adjusting the seat unit

Common adjustments on the Snappi Seat can be made by hand (such as back height and back recline angle) and require no tools. Less frequent adjustments are made using a 5mm hexagon key (supplied), such as the seat depth and width. No other tools are required to make adjustments to the seat.

5.1.1 Seat Depth and Hip Guides

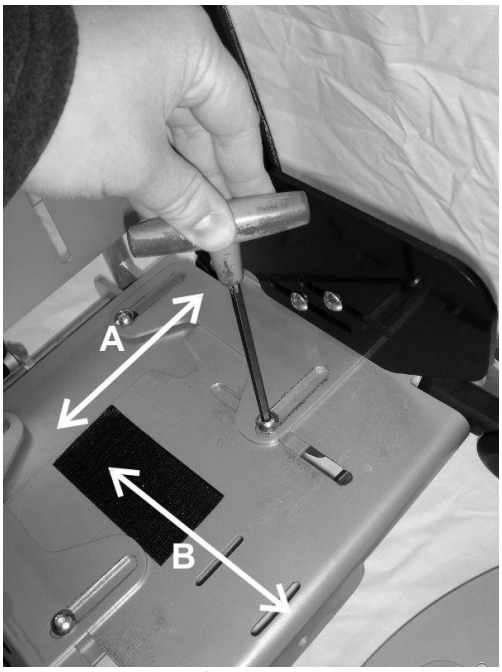

Fig 5.1.1.1

To adjust the seat depth and width, first remove the seat base cover (this is attached by Velcro in the centre of the seat and is easily removed by pulling it away from the frame).

Using the supplied 5mm hexagon key, loosen the 4 seat fixings.

Next set the seat width ('A' see Fig 5.1.1.1) as measured in section 5.0 by sliding the hip guide brackets in or out as required.

To adjust the seat depth ('B' see Fig 5.1.1.1), slide the upper of the base plates forward or back to achieve the required position.

Once adjusted, tighten the 4 bolts using the hexagon key and fit the cover back into place.

The Snappi hip guide also offers depth adjustment ('C' see Fig 5.1.1.2) to best suit your child's needs.

To adjust this, remove the hip guide cover. This is done by unclipping the two "poppers" and lifting the cover off the plastic plate.

Next, use the 5mm hexagon key to loosen the 2 fixings, and slide the plate into the desired position as shown (see Fig 5.1.1.2).

Once adjusted, tighten the 2 fixings and refit the hip guide cover.

Fig 5.1.1.2

5.1.2 Footrest Depth and Knee Angle Adjustment

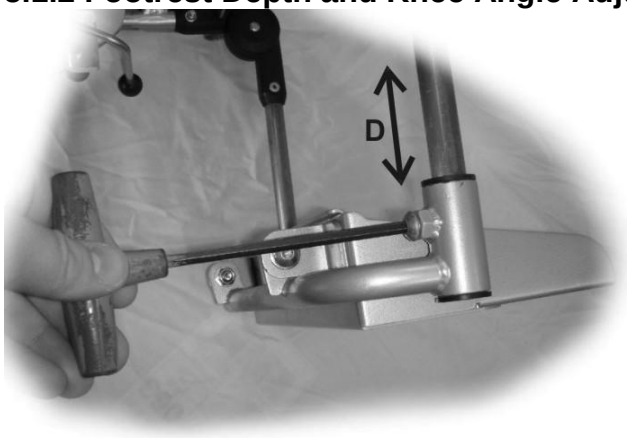

Fig 5.1.2.1

To adjust the foot depth, loosen the 2 securing bolts (size 1) using the 5mm hexagon key as shown (see Fig 5.1.2.1). On the size 2, wing nuts are fitted in place of bolts, and therefore the adjustment can be made by hand.

Slide the footrest up or down the guide tubes to the required height as measured in section 5.0

Once set, lock the position by tightening the 2 fixing bolts / wing nuts.

To adjust the knee angle, press in the angle adjustors on both sides of the footrest at the same time (see Fig 5.1.2.2), and lift the footrest guide tubes to the required angle. To lock, release the buttons.

Note that the adjustors can only be locked in 15° increments.

For the rearward facing Snappi it may be necessary to reduce the length of the footrest stems to avoid the footrest catching and inadvertently operating the brake bar. Alternatively the buggy can be placed in some degree of tilt and space to avoid this situation.

Fig 5.1.2.2

5.1.3 Back height and recline angle adjustment

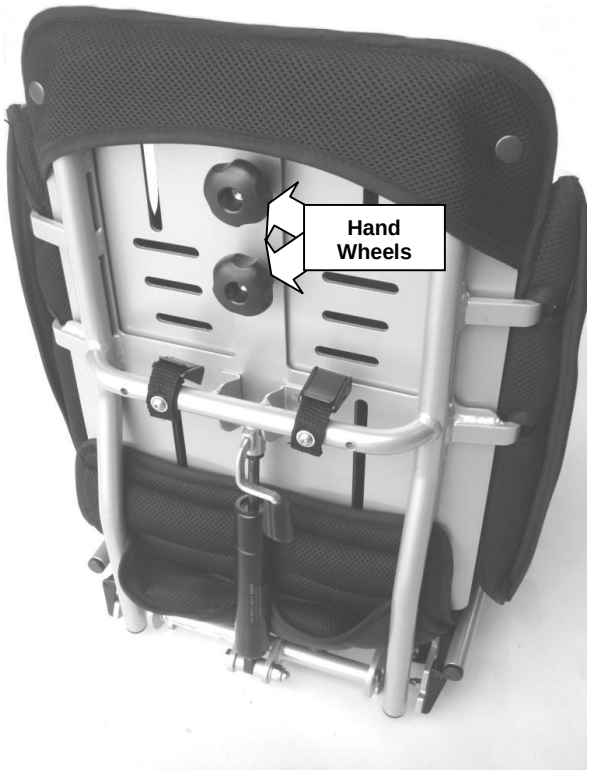

Fig 5.1.3.1

To adjust the back height, first un-tuck the cover from the bottom of the seat (the cover doesn't need to be removed however).

Next, loosen the 2 large central hand wheels on the back plate as shown (see 5.1.3.1).

Once these are loose, raise or lower the upper section of the back to the required height, and tighten the 2 hand wheels to lock it in place.

Once adjusted, tuck the cover back around the bottom of the seat with the excess sitting between the lower back plate and the gas spring.

To adjust the back angle, grip the adjustment lever and lift it up, whilst holding the rear cross bar with your thumb. (See Fig 5.1.3.2)

To recline the seat, pull the top of the seat backwards to the required angle, and release the adjustment lever.

To bring the seat back to a 90° position, pull the release lever and gently lift the seat (the gas spring will assist in returning the seat). Once at the required angle, release the adjustment lever.

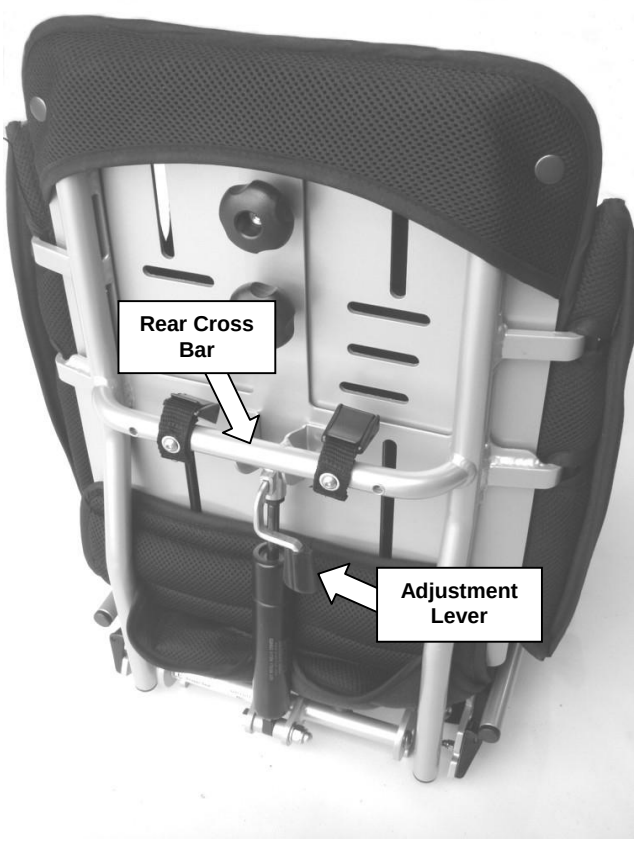

Fig 5.1.3.2

5.1.4 Lateral Supports (Optional)

Fig 5.1.4.1(Lateral Trunk Supports with Chest Belt)

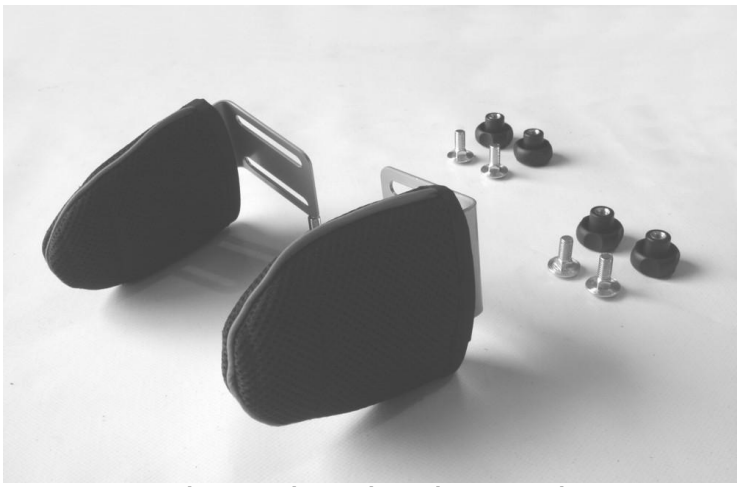

Fig 5.1.4.1(Lateral Trunk Supports)

The lateral trunk supports are supplied with two M8 coach bolts, and two 30mm hand wheels per bracket (see Figs 5.1.4.1and 5.1.4.2).

To fit the laterals:

The laterals are fitted by securing with coach bolts and hand wheels, through the mounting slots ‘H’ (see Fig 5.1.4.3) on the back of the seat unit.

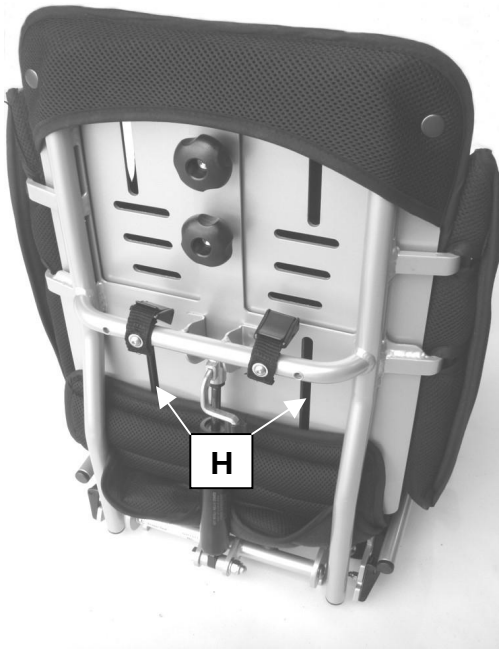

Fig 5.1.4.3

Fig 5.1.4.4

The lateral bracket must be fed through the slot in the cover (see Fig 5.1.4.4).

Next, insert the 2 coach bolts through the bracket and seat back plate, so that the square neck is sitting fully in the slots.

Finally, secure the laterals by screwing the provided hand wheels onto the protruding threads of the coach bolts (see Fig 5.1.4.5).

The position of the laterals can be adjusted laterally by loosening the hand wheels and sliding them in or out to the required width.

They can be adjusted vertically by sliding up and down the mounting slots 'H'(see fig 5.1.4.3). There is a partition in the slots between the upper and lower back plates. To achieve the full adjustment range, the laterals need to be fitted in the appropriate section of the slots.

Fig 5.1.4.5

5.2 Fitting and removing the cover

Fig 5.2.1

To remove the seat pad:

Simply lift the front edge of the seat pad to separate it from the Velcro strip on the base.

To remove the hip guide covers:

The cover hooks around the front of the hip guide plate. To remove, lift and rotate the cover from the rear as shown, and then unhook the cover from under the front of the hip guide plate.

Fig 5.2.2

Fig 5.2.3

To remove the side pads:

Undo the 2 ‘popper’ fasteners, (See Fig 5.2.3) and unpeel the Velcro securing the pad.

The pad will then be free to remove.

To remove the back pad:

Undo the 2 ‘popper’ fasteners located on the top left and right corners of the seat (see right).

Next unhook the top of the back pad from the seat, and then un-tuck the material from around the bottom of the seat back plates to release the cover.

Fig 5.2.4

5.3 Fitting a Headrest Pad or Lateral Head Supports (optional)

Fig 5.3.1

To fit a headrest pad:

There are three types of one piece headrest available; standard, extra recess (Fig 5.3.1) and occipital roll, however these can all be fitted to the seat in the same way.

The headrest pads include a pair of Velcro securing straps.

The headrest is fitted to the cover, through the upper fitting slots (see Fig 5.3.2).

Fig 5.3.2

Fig 5.3.3

First, remove the seat back pad from the frame (see section 5.2).

Next, feed the Velcro straps though the slots, and join together to secure the headrest in place.

Finally, refit the seat back pad to the seat frame.

Fig 5.3.4

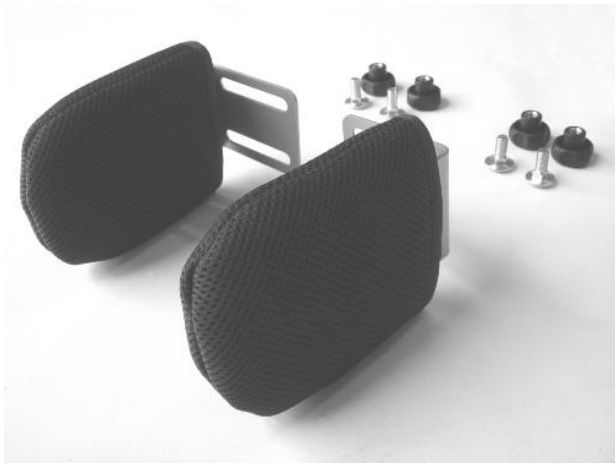

Fig 5.3.5

The lateral head supports are supplied with two M8 coach bolts, and two 30mm hand wheels per bracket (see Fig 5.3.5)

To fit the head supports:

The lateral head supports are fitted by securing with coach bolts and hand wheels, through the mounting slots 'I' (see Fig 5.3.6) on the back of the seat unit.

The position of the laterals can be adjusted laterally by loosening the hand wheels and sliding them in or out to the required width. They can be adjusted vertically by sliding up and down the mounting slots 'I'(see fig 5.3.6).

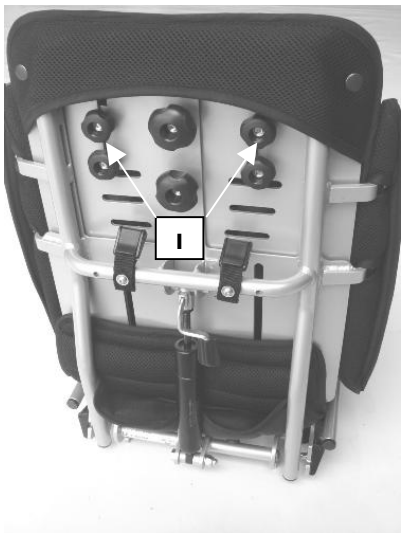

Fig 5.3.6

5.4 Fitting the Pelvic Straps

Unless a 4-point pelvic strap (Fig 5.4.2) is ordered, the seat will come provided with a 2-point pelvic strap (Fig 5.4.1) fitted as standard.

Fig 5.4.1 (Supplied as standard)

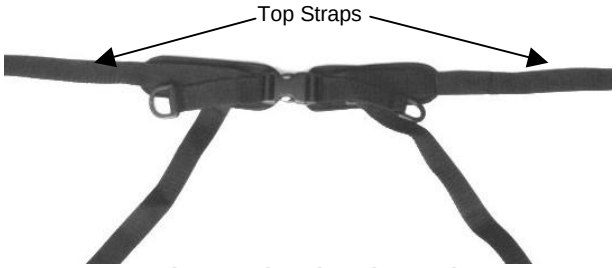

Fig 5.4.2(Optional Extra)

To fit the 2-point pelvic strap to the old-style Snappi, (which can be distinguished by having only one cam-lock buckle on each side):

Open the cam-lock buckles (these are located on the bottom left and right corners of the seat base).

Feed the webbing of the strap through the cam lock. (See Fig 5.4.3)

Fig 5.4.4

The pelvic strap should be fitted to the seat such that the 2 padded areas are facing the back of the seat (so that they will be against the child when he / she is in the seat)

Fig 5.4.3

Adjust the length of the pelvic strap by pulling the webbing through the cam buckle until it is at the required length. (Fig 5.4.4)

Once adjusted, lock the cam buckle on both sides to secure the strap.

Important: The pelvic strap must be located as low down over the hips as possible. It must not cross the stomach of the passenger.

To fit the 2-point pelvic strap to the new-style Snappi, (which has 3 cam buckles on each side:

Open the middle cam-lock buckles (these are located on the bottom left and right corners of the seat base).

Feed the webbing of the strap between the seat plate and seat depth adjustment tube, and through the cam lock. (See Fig 5.4.5)

Fig 5.4.5

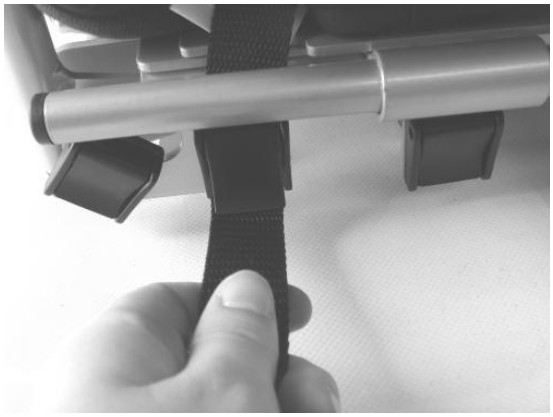

Fig 5.4.6

Adjust the length of the pelvic strap by pulling the webbing through the cam buckle until it is at the required length. (Fig 5.4.6)

Once adjusted, lock the buckles on both sides of the seat to secure the strap.

Important: The pelvic strap must be located as low down over the hips as possible. It must not cross the stomach of the passenger.

To fit the 4-point pelvic strap to the new-style Snappi, (which has 3 cam buckles on each side:

Open the middle and front cam-lock buckles.

Feed the top webbing straps (See Fig 5.4.2) between the seat plate and seat depth adjustment tubes and through the middle cam lock. (See Fig 5.4.5)

Feed the bottom webbing straps through the slot at the bottom of the Hip Guide plates, over the seat depth adjustment tubes and through the front cam lock. (See Fig 5.4.7)

Fig 5.4.7

5.5 Fitting the Groin Adaptation Strap (Optional)

Fig 5.5.1

The Groin Adaptation strap is a piece of webbing which can fit to the pelvic strap or the H belt harness to help with the positioning of the child. It is designed to help prevent the child from slipping forward underneath the harness.

Feed the loop end of the strap up through either of the two slots in the base of the seat. (See Fig 5.5.3) The slot that should be used will be determined by the size of the child. For larger children the slot closest to the front of the seat will probably be more suitable, whilst for smaller children the second slot in would most likely be appropriate. Please note you may need to move the 3 bar slider down the strap.

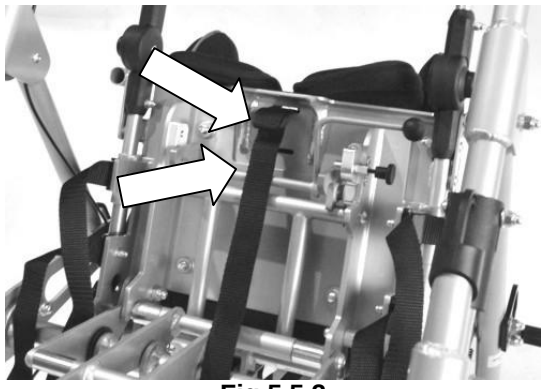

Fig 5.5.2

Fig 5.5.3

The pelvic strap, or lap belt of the H-belt harness should then be threaded through the loop end of the groin adaptation strap. (See Fig 5.5.2) Once the strap is in place, and you have comfortably positioned your child, slide the 3 bar slider up so that it is as close under the seat as possible. This will keep the strap in place.

5.6 Fitting a Butterfly/Chest Harness (Optional)

The Butterfly harness comprises a padded section that sits against the user's chest, two shoulder and two bottom straps. Either the shoulder or the bottom straps are locked in a position to suit the user and then final adjustment is made on the opposite straps.

The harness is designed to provide comfortable postural support for the user.

Important: The harnesses fitted are for postural support only and must not be used as a vehicle harness. Please see section 13 for transport instructions.

Fig 5.6.1

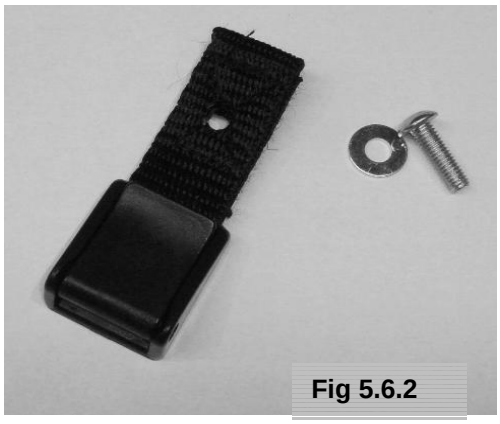

Fig 5.6.2

If the Snappi was not originally supplied with a butterfly/chest harness then you will need to fit the cam buckle fixing points (Fig 5.6.2) to the rear of the seat.

To do this: thread the supplied bolts and washers through the holes in the webbing straps and screw through the fixing holes in the bar on the rear of the seat (Fig 5.6.3). For a size 1 Snappi we recommend using the inner holes, and for the size 2 Snappi the outer holes. Tighten using a 3mm Allen Key so that the cam buckles face outwards (Fig 5.6.4)

Fig 5.6.3

Fig 5.6.4

Fig 5.6.5

Thread the two top straps through the slots in the back cover and back plate, from front to back, at the desired height (Fig 5.6.5)

Thread the webbing through the cam buckles until the harness is at the desired height and then close the cam buckles to secure the webbing (Fig 5.6.6).

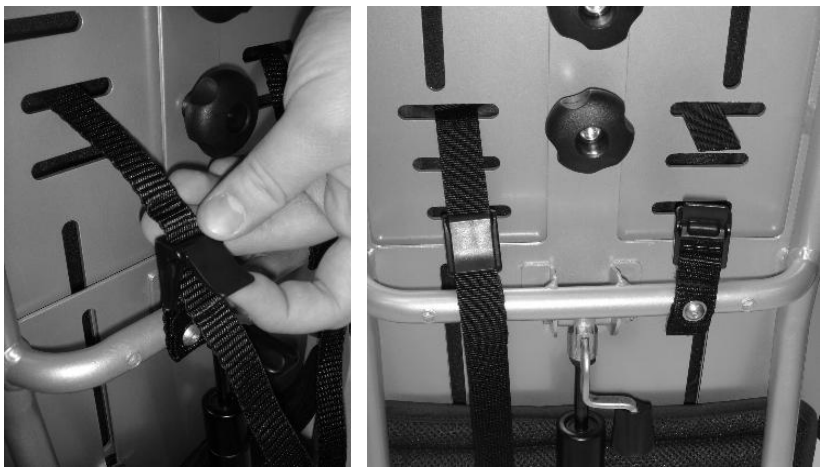

Fig 5.6.6

IMPORTANT: – In order to ensure that the Butterfly (Chest) harness can not rise up and cause harm to the user, every time the harness is in use, you must ensure that all cam buckles/fixings are properly closed and that the harness is correctly positioned a minimum of 75mm below the user's neckline. Failure to comply with this could result in serious injury.

(On Snappi Pushchairs with 3 side cam buckles) Thread the bottom straps through the gap at each side between the back upholstery and hip guides and down through the cam buckles at the rear of the side plate. Set at the desired length and close cam buckle to secure webbing (Fig 5.6.7)

Fig 5.6.7

OR

(On Snappi Pushchairs with 1 side cam buckle) Thread the bottom straps through the gap at each side between the back upholstery and hip guides. Twist the cam catch to one side so you can access the top of the bolt where you will need to attach the harness bottom strap (Fig 5.6.8).

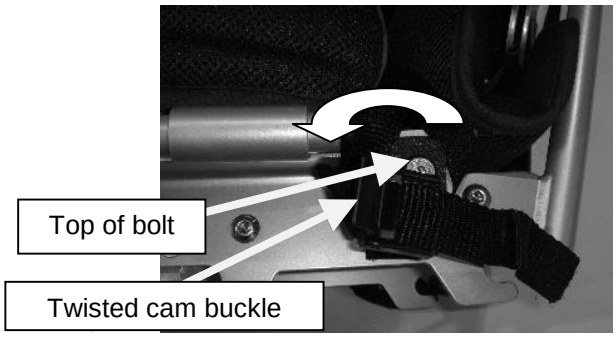

Fig 5.6.8

Fig 5.6.9

Using a 6mm Allen Key and a 10m spanner undo the nut (nearest to the base of the seat) and remove the nut and washer. Place the folded end of the bottom harness strap through the bolt using the pre-drilled hole. Ensure the strap is flat then replace washer and nut, retighten the nut. (Fig 5.6.9)

Twist the cam buckle back into its original position (Fig 5.6.10)

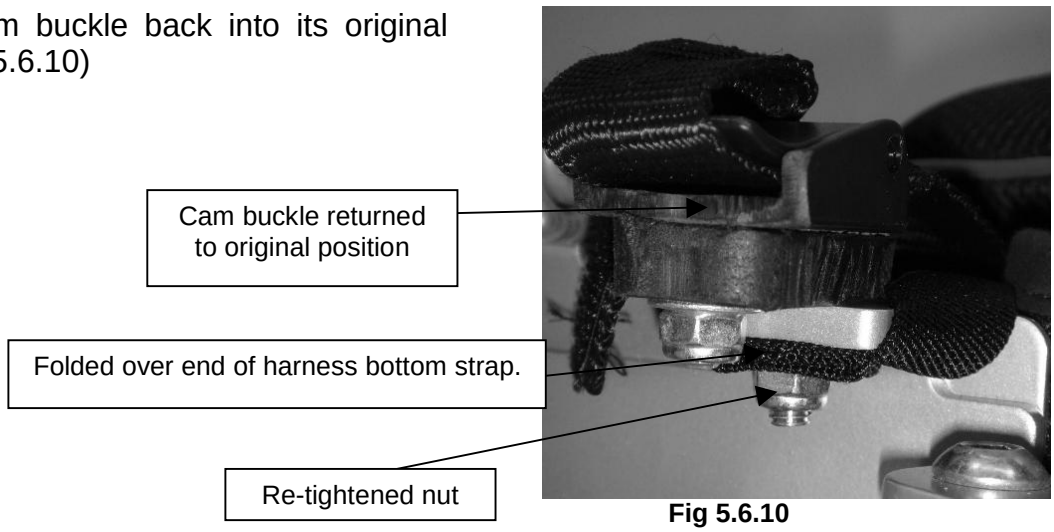

Fig 5.6.10

5.7 Final checks

1. **IMPORTANT:** In order to ensure that the Butterfly (Chest) harness can not rise up and cause harm to the user, every time the harness is in use, you must ensure that all cam buckles/fixings are properly closed and that the harness is correctly positioned a minimum of 75mm below the user's neckline. Failure to comply with this could result in serious injury.
2. Check that the pelvic strap is secure and adjusted correctly.
3. Check that the cover is correctly fitted.
4. Check that the seat unit is located and locked correctly in the chassis.
5. Ensure the safety catch is locked.
6. Position the child correctly in the seat, and assess the child's posture, if the child's posture appears to have changed remove the child and compare the support positions to the measurements taken in section 5.1. Adjust the supports as required, and reseat the child.
7. Check footplate position and adjust if necessary.

6: Accessories

6.1: Shopping Basket

Fig 6.1.1

Fitting / removing the shopping basket:

There are 4 hanging points located on the insides of the side plates (see left).

To fit the shopping basket, clip the snap hooks on the basket onto the 4 clipping points.

To remove the shopping basket, simply unclip the 4 hooks.

The shopping basket includes an expandable section at the back to help with loading of bulky items. To expand the basket, simply peel apart the Velcro at the back to release the extra material.

Important:

- Always check that the shopping basket is securely fitted before use.
- The maximum carrying load for the shopping basket is 3kg.
- Always ensure that the total load of the occupant and accessories does not exceed the maximum carry limit stated for the pushchair (see section 1 of this manual).
- The shopping basket may remain fitted when folding the wheelbase.
- All contents must be removed from the shopping basket before folding the pushchair.
- The contents of the shopping basket must be removed when using the pushchair as a seat in a motor vehicle.

6.2: Equipment Carrying Tray

To Fit the equipment carrying tray:

The equipment-carrying tray has 2 sets of fixing points on its underside to secure it to the chassis (see right).

Feed the tray under the wheelbase from the front of the chassis and hook the rear points ‘A’ under the rear cross bar, ensuring that the tray is in the middle so it sits in-between the vertical brake bars.

Next, with the front turn catch ‘B’ rotated out of the way; rotate the tray down so it sits on the front cross bar.

Finally turn the front catch ‘B’ 90 degrees so it sits under the front cross bar (this catch may be quite tight).

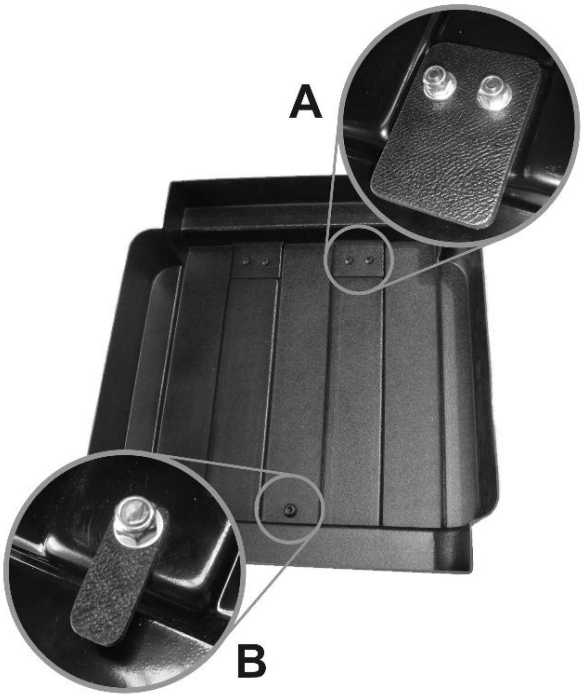

Fig 6.2.1

To remove the tray, unlock catch B, lift up and remove the tray from the chassis.

Fig 6.2.2

Important:

- Always ensure the equipment-carrying tray is securely fitted before use.
- The maximum carrying load for the equipment-carrying tray is 20kg.
- Always ensure that the total load of the occupant and accessories does not exceed the maximum carry limit stated for the pushchair (see section 1 of this manual).
- The equipment-carrying tray must be removed before folding the chassis.
- The equipment-carrying tray must be removed when using the pushchair as a seat in a motor vehicle.

6.3: Sun Canopy

There are 2 styles of sun canopy available for the Snappi Pushchair: The 'Classic Style' and the 'Umbrella Style'.

To fit the Classic Style sun canopy first unfold the sun canopy.

Then clip the 2 fixing brackets onto the frame (see arrows, right), so that the top bracket sits just beneath the tilt release lever.

The sun canopy can then by angled to the desired position.

To remove the sun canopy, simply unscrew the clips.

(*Seat shown in fig 6.3.1 is for illustration purposes only)

Important:

- You must remove the sun canopy before folding the frame.
- You must remove the sun canopy when using the wheelbase as a seat in a motor vehicle.

Fig 6.3.1 *

Fig 6.3.2

To fit the Umbrella Style sun canopy:

Remove the umbrella from its protective sleeve.

Next, unclip the frame fixing from the umbrella by pressing on the button and pulling apart as shown in Fig 6.3.2

Next, unscrew the frame mounting to open the jaws until it will fit over the frame.

Position the mounting onto the upper frame tube (see fig 5.3.4 below).

Adjust the angle of the clip so that it is vertical.

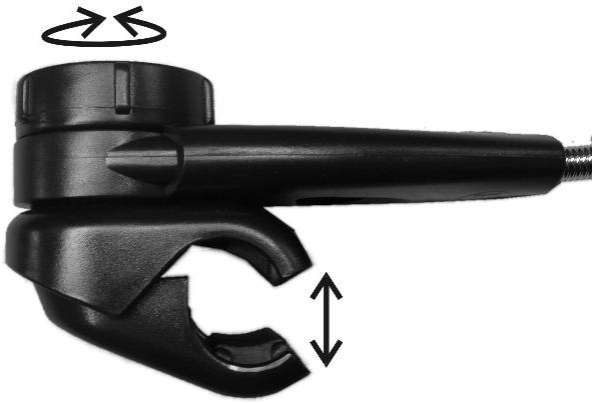

Fig 6.3.3

Fig 6.3.4

When in the desired position, retighten the screw to lock it onto the frame

Finally, clip the umbrella section back onto the mounting by pushing the 2 halves of the clip back together, and open the umbrella.

If a different angle is needed, simply loosen the locking screw, move to the required angle and retighten.

Important:

- You must remove the umbrella section before folding the frame (the frame mounting clip can be left in place).

- The entire sun umbrella must be removed when using the pushchair as a seat in a motor vehicle.

6.4: Rain Cover – not suitable for rearward facing Snappi

To fit the rain cover:

Attach the 4 push-on clips to the upper frame of the pushchair, with the open clip section pointing downwards.

The lower clip fits directly above the nylon locking slider, while the upper clip attaches to the upper frame tube.

Feed the open flap of material around the rear frame, inside the push handles.

Next fold the cover down, and secure the bottom using the 2 elastic ‘C’ clips.

Finally, join the rear flap of material to the sides of the rain cover with the Velcro tabs.

To fold the cover back when not needed, simply unhook the 2 elastic ‘C’ clips and fold back. The cover can be secured in the open position by attaching the C clips to the upper frame.

Fig 6.4.1

Important:

- The cover is for outdoor use only.
- The cover must be folded back if the child remains in the pushchair when taken indoors. Otherwise the child may overheat. The cover must also be folded back in warm sunny weather.
- Ensure your child’s fingers are clear of the frame when folding the rain cover back, as the scissor action of the cover frame can trap small fingers.
- The rain cover must be completely removed before folding the wheelbase.
- The rain cover must be removed when using the pushchair as a seat in a motor vehicle.
- If you are fitting a rain cover as well as the frame padding, it is important that you fit the rain cover to the pushchair first and then fit the frame padding round it. Finally join the rear flap of material to the sides of the rain cover with the Velcro tabs.

6.5: Frame Padding

Fig 6.5.1

To fit the frame padding, simply wrap around the section of framework to be padded, and clip the snap fasteners together (See Fig 6.5.1). Repeat on the other side.

If you are fitting a rain cover as well as the frame padding, it is important that you fit the rain cover to the pushchair first and then fit the frame padding round it. Finally join the rear flap of material to the sides of the rain cover with the Velcro tabs.

6.6: Grip Rail

The grip rail is provided with two thumbscrews for fitting to the pushchair (See Fig 6.6.1).

Important: The grip rail is not designed as a safety barrier. Suitable harnessing must always be used.

Fig 6.6.1

Fig 6.6.2

In order for the occupant to reach the grip rail, the vertical tubes are angled. This enables the grip rail to be fitted either leaning towards the occupant or away from them.

When the seat depth is extended, the grip rail will need to be fitted with the vertical tubes angled towards the occupant (See Fig 6.6.3). When the seat depth is short, the grip rail should be fitted angled away from the occupant (See Fig 6.6.4).

To fit the grip rail, place the vertical tubes into the receivers on either side of the seat unit (See Fig 6.6.2).

Note there may be a small plastic cap in the top of the receiver. If this is the case, remove the cap using a small flat bladed screwdriver before fitting the grip rail.

Once you have the vertical tubes in place, put the thumb screw in the hole on the back of the receiver and tighten until the tube is being held securely – do not over-tighten.

Fig 6.6.3

Fig 6.6.4

6.7: Playtray – not suitable for rearward facing Snappi

The Snappi playtray offers height, depth and angle adjustment, so that it can be adapted to suit your needs. It is available in clear or black. (Clear playtray shown for illustrative purposes).

Fig 6.7.1

The play tray comes supplied with the following:

- 2 angle adjustable vertical stems (fitted to the tray)
- 2 depth adjustment brackets and thumbscrews (fitted to the tray)
- 2 additional thumbscrews for the seat receiver brackets.

Fig 6.7.2

To fit the play tray to the seat, locate the 2 vertical stems on the bottom of the tray into the 2 receivers on the seat unit. Note there may be a small plastic cap in the top of the receiver. If this is the case, remove the cap using a small flat bladed screwdriver before fitting the playtray.

Screw the 2 thumbwheels supplied with the tray into the welded nut on the receivers as shown (see Fig 6.7.2). Position the tray to the required height, and then secure it in place by tightening the thumbscrews.

To adjust the angle of the playtray, loosen the 2 angle adjustors (see Fig 6.7.3).

Once loose, adjust the angle as required and retighten.

N.B. the angle adjustors are toothed, and may require some force to move. The angle adjustors move in 5-degree increments.

Fig 6.7.3

Fig 6.7.4

To adjust the depth of the playtray, loosen the 2 thumbscrews under the base of the tray (See Fig 6.7.4).

Slide the tray in or out to the required depth, and then retighten the screws.

Notes:

- We recommend that the playtray is removed before making any adjustments to the seat or seat tilt, and is then refitted and adjusted accordingly once the seat is in the desired position. When adjusting the Tilt in Space facility, the angle of the playtray must be adjusted to the new horizontal position (see above instructions for how to adjust the angle of the tray).
- All items must be removed from the playtray before making any adjustment to the tray or seat to avoid the risk of causing accidental harm to the occupant.
- The playtray must be removed before folding the pushchair.
- The playtray must be removed when transporting the chair in specially adapted vehicles.
- The playtray cannot be used at the same time as the rain cover.
- Never leave you child unattended with the play tray fitted, especially when items are positioned on the tray.
- Extra care must be taken when placing food or drink on the tray.
- Maximum carrying capacity of the play tray is 5kg.

6.8: Pommel

If the Pommel is ordered as a replacement item then you will just receive the pommel itself;

- Pommel bracket, block, pads and cover (assembled)

If the Snappi was supplied without a pommel then you will need the pommel mounting kit as below;

- Pommel mounting bracket
- M6 x 10 wing nut
- M6 x 16 socket button (x 2)
- Form A Washer (x 2)
- M6 Dome Nut (x 2)

Fig 6.8.2

Slide the vertical stem of the pommel into the slot, with the body of the pommel sitting over the seat.

Screw the wing nut into the centre hole of the mounting bracket and tighten to secure the pommel.

Adjust the height of the pommel as required to clear any seat pads and the cover.

To change the height, loosen the wing nut, adjust to the required position, and then retighten.

Fig 6.8.1

To fit the pommel to the seat:

If the Snappi was supplied with a pommel at the time of purchase the mounting bracket will already be fitted. If not, you will need to attach the mounting bracket into the two holes on the front of the seat.(See Fig 6.8.2)

To do this, position the mounting bracket on the front of the seat and put the M6 x 16 socket buttons (screws) through the 2 holes in the mounting bracket and through the 2 holes in the seat. Put a washer and a dome nut on the end of each socket button and tighten.

Fig 6.8.3

IMPORTANT: The pommel must not to be used to prevent the occupant sliding forward.

7. User Instructions

7.1 Getting into the Snappi Pushchair

1. Put the brakes on.
2. Place the child into the seat so that their feet are on the footplate.
3. Fit the pelvic strap (and or a harness) to the child and secure.
4. Fit foot straps and ankle straps if required.

7.2 Getting out of the Snappi Pushchair

1. Put the brakes on.
2. Undo any harnessing and foot straps.
3. Lift the child from the seat.

8: Attendant pushing

8.1 Pushing

Important:

- ***At the start of every journey make sure that the interface is correctly fitted into the frame and that the locking clips are fully closed. Please refer to section 4.3 'Fitting the seat to the chassis' for more information.***

- ***Do not allow children to play with either of the gas spring release levers.***

1. The wheelbase is easy to push over hard, even surfaces but may be more difficult over rough, uneven surfaces and the wheels can sink into soft ground. **Never force the wheelbase if it becomes stuck**, this may cause the rear wheels to lift and the wheelbase to be tipped forwards. If the wheelbase gets jammed on a stone or cracked pavement, tip it backwards to raise the front wheel over the obstacle and then proceed. On soft ground it may be easier to pull the wheelbase backwards.

2. The wheelbase has swivelling front castor wheels and is easily steered simply by turning the wheelbase in the desired direction.

3. Whenever possible avoid steep and uneven surfaces because there is a danger that the wheelbase may tip over. If you cannot avoid difficult surfaces you must take extra care when travelling across them.

4. Do not use the wheelbase in sandy conditions.

5. Always use two hands for pushing the wheelbase.

6. For the comfort of the occupant always avoid pushing too fast or making sudden fast turns, jerking, jolting and bumping. Many occupants are liable to be affected by rough handling, which can cause loss of confidence, discomfort or pain.

7. Avoid kerbs. Wherever possible use ramped kerbs or slopes. This will make pushing the wheelbase easier and safer and will be more comfortable for the occupant.

8. Avoid steep kerbs and flights of steps because of the danger of losing your grip on the wheelbase or of the occupant being tipped out. Always use a ramp or lift if available. Do not push the chair down flights of stairs as this puts strain on the pushchair and puts the occupant at risk.

9. To tip the wheelbase backwards when climbing kerbs, stand behind and whilst holding onto the push handle with both hands, press down and pull backwards. This will lift the front of the wheelbase.

IMPORTANT:

Take great care when doing this to avoid the combined weight of the wheelbase and occupant overcoming your strength and tipping back onto you. Never try to tip the wheelbase if the occupant is much heavier than you are.

10. Always look well ahead so that you have plenty of time to avoid hazards.

11. Be considerate to other people and watch out for pedestrians who may stop or suddenly change direction.

8.2 Brakes

Always put the brake on when placing the child in or taking them out of the seat.

Do not leave the pushchair on a slope, even with the brake on. Always ensure that the pushchair is on level ground to prevent risk of injury to the occupant.

Do not leave the brake on when the pushchair is not in use as this will damage the rear wheels.

8.3 Comfort

1. Always be considerate to the occupant.

2. Before setting out on a journey make sure the occupant is comfortably and correctly seated and that any safety harness is correctly fitted and adjusted. Always ensure that both feet are supported and that clothing is tucked in and cannot catch on doorways or other obstructions.

3. Remember the occupant is in front of you. They will want to be part of your conversations and interests. Also their view will be different to yours when it comes to looking into shop windows, etc. it can be extremely frustrating to hear something exciting being discussed when it is situated somewhere behind the occupant's eyes, and thus, out of sight.

8.4 Lifting and general safety

1. The Snappi Pushchair is designed to carry one person only. Never allow children to play on, or stand on the footrest or frame. Never hang anything such as bags on the push handle. If you do, there is a danger of the wheelbase tipping backwards.

2. If it is necessary to lift the wheelbase whilst it is occupied always use two people, one at the front the other at the back.

3. For your own safety and good practice never lift the empty wheelbase until it has been properly folded. Always use good lifting practice.

4. Do not allow children to play with the gas spring release lever.

5. Never leave the child/occupant unattended, even with harness fitted.

6. Keep children clear of the wheelbase during opening and folding.

9. Cleaning

9.1 Buggy and seat unit

1. To clean the buggy or seat unit, wipe with a damp cloth and dry thoroughly.
2. For more stubborn stains wipe with a damp cloth and warm water in which a little mild soap has been dissolved. Dry thoroughly.
3. Never use furniture polish or any spirit to clean the frame.

9.2 Seat Cover

1. Remove the cover from the seat as detailed in section 5.2. To wash, use a 30℃ Synthetic Wash cycle.
2. Dry the cover thoroughly before re-assembly. **Do not tumble dry or dry clean.**

9.3 Pelvic strap & harnessing

1. Remove the pelvic strap or harness from the seat.
2. Wipe with a damp cloth and dry very thoroughly. **Do not tumble dry.**
3. **Do not immerse in water or wash in a machine.**

10: Maintenance

Should a problem be found when carrying out the regular checks, it should be immediately reported to the issuing authority or Tendercare Ltd.

10.1 Routine maintenance

The user's family can easily carry out the following tasks. The supplied 5mm Allen key is required to tighten the footrest.

1. Always wipe the wheelbase and seat frame dry. Never put them away damp.

2. Check that the two M8 x 16 footrest bolts are in place and are tight by using the Allen key (daily).

3. Check all nuts, bolts, and hand wheels are tight (daily)

4. Check operation of the brake, folding and reclining mechanisms (weekly).

5. Check condition of harnessing and stitching (weekly).

6. Clean frame when necessary (we suggest at least once a week).

If you find any faults refer to your issuing authority or Tendercare Ltd.

10.2 Six-monthly maintenance

Only someone who is a competent tradesman or repairer should carry out this work. If a major fault is found stop using the wheelbase until it has been corrected.

1. Fold and open the wheelbase. Check that all movements through the folding range are free. Examine frame for any damage.

2. Check operation of the wheelbase tilt in space mechanism, and the seat back recline.

3. Examine upholstery and foot straps for wear and arrange for replacement if necessary.

4. Examine nuts, bolts, pivots and frame plugs for tightness and general condition.

5. Examine brake assembly for wear, damage and correct operation.

6. Examine tyres for sharp objects, cuts or splits.

7. Examine castor and wheel bearings for excessive wear.

8. Check castors and rear wheels for free rotation, security and accumulation of fluff and grit. Remove any fluff and grit with a dry lint free cloth.

9. Check the Seat Interface fits securely into the frame, and that it is not worn or damaged.

10. Check the interface clips to ensure they can rotate freely and that the springs return the clips to the closed position when released.

For all other repairs refer to your issuing authority or Tendercare Ltd.

11. Oxygen Cylinder

1. If a portable oxygen cylinder is required, the maximum size recommended by Tendercare is type PD 455 mm long x 100 mm diameter weight approximately 10 kg. For cylinder and safety information contact:

   BOC Gases, Customer Service Centre, Priestley Road, Worsley, Manchester, M28 2UT. Tell: 0800 111 333.

Warnings:
If using medical oxygen cylinders ensure compliance with applicable regulations.

When mounting an oxygen cylinder onto the Snappi Pushchair care must be taken to ensure the system will not be damaged in any way. In addition the stability of the Snappi Pushchair must not be adversely affected. If necessary, stability tests should be carried out on the loaded assembly.

2. If an oxygen cylinder is required it must be mounted in an approved carrying tray, be adequately supported and restrained considering the intended use and environment.

Important:
When the Snappi Pushchair is used as a seat in a vehicle, the oxygen cylinder and carrying tray must be removed.

3. Valve, gauges and fittings must be adequately protected from mechanical damage.
4. When using an oxygen cylinder, users and carers should be aware of the potential hazard caused by smoking, naked flames or other exposed heat sources, oil or grease.
5. Because the fitting and use of oxygen are outside the control of Tendercare Ltd, Tendercare Ltd does not accept any liability relating to the use of oxygen with the Snappi Pushchair.

12: Warranty

1. Tendercare undertakes to repair or replace free of charge, any parts or part found to be defective due to manufacturer within a period of 12 months from the date of delivery.

2. Tendercare Limited will not repair or replace free of charge any part or parts found to be defective due to abuse, misuse or lack of correct maintenance.

3. The warranty does not cover any damage caused by modifications undertaken by anyone other than Tendercare Ltd.

4. Equipment for warranty claims should be returned in a strong carton. There may be a charge for collection. Contact Tendercare Customer Service Department on 01903 726161.

13: Transporting the Wheelbase

The Snappi Pushchair can be folded for transport in the luggage area of a vehicle as detailed in sections 4.5 and 4.6 of this manual.

The Snappi Pushchair (excluding the rearward facing Snappi) has been successfully impact tested against International Standard ISO 7176-19 and may be used as a vehicle seat.

IMPORTANT:

When used as a vehicle seat the following instructions must be followed.

13.1 Preparing the system for transport

1. Check that the child is correctly strapped in the seat using the lap and diagonal seat belt.

2. **Important:** Any harness fitted to the pushchair is for postural support only and must not be used as a transport harness. The pelvic strap must be located as low down over the hips as possible: It must not cross the stomach of the passenger.

3. **Important:** In order to ensure that the Butterfly (Chest) harness can not rise up and cause harm to the user, every time the harness is in use, you must ensure that all cam buckles/fixings are properly closed and that the harness is correctly positioned a minimum of 75mm below the user's neckline. Failure to comply with this could result in serious injury.

4. **Remove any accessories such as a Pommel, Tray, Rainhood, Shopping Basket or Carrying Tray**.

5. The seat can either be set vertically or tilted to a mid recline position for transportation.

13.2 Attaching wheelbase to vehicle

1. The Snappi Pushchair must be attached to the vehicle using a 4-point wheelchair restraint that complies with one of the following: ISO 10452 Part 2, SAE2249 or DIN 75078/2. **NO other restraint system can be used.**

Note: *Such restraints are manufactured by Unwin Safety Systems & Q'Straint*

2. **Only a trained person should attach the restraints**.

3. When fitting the restraints please refer to the manufacturer's guidelines. Please direct any concerns or queries regarding the restraint system to the original supplier.

4. Position the assembly correctly in the vehicle over the floor track with the front of the wheelbase facing towards the front of the vehicle *(in the direction of travel)*. **Put The Brakes On.**

5. Attach the front restraints to the floor track and around the frame where the front crossbar and vertical tubes meet (just above the front castors)

Fig 13.2.1

6. Attach the rear restraints to the floor track and to the two rear tie down brackets on the frame. These are positioned halfway up the rear frame, just above the brake mechanism.

Fig 13.2.2

7. To release the wheelbase follow the above instructions in reverse order.

IN EMERGENCY PRESS THE RELEASE BUCKLES

Warning:

- ***The above only secures the wheelbase not the passenger. It is essential that a separate vehicle harness be fitted to the passenger.***
- ***The rearward facing Snappi Pushchair has not been crash tested for use as a vehicle seat and must not be used for transportation. Rearward facing Snappi Pushchairs are supplied without the transit brackets to ensure that it is not transported in error. If at a later date the Snappi is required to be forward facing, transit brackets can be purchased and fitted by a competent trained person only.***
- ***If transporting medical oxygen cylinders ensure compliance with applicable standards.***
- ***Any item involved in an accident no matter how minor MUST BE WITHDRAWN FROM SERVICE IMMEDIATELY AND REPLACED.***

14: Repairs

1. Repairs: For all repairs contact your issuing authority.

2. Major repairs: For all major repairs e.g. bent or damaged frame, the equipment should be returned to the factory. Contact Tendercare Ltd customer services on (01903) 726161.

3. An approved agent may carry out the following repairs and replacements; Replacement of Wheels, brakes and Gas struts. A workshop manual is available to repairers from Tendercare Ltd.

Important Points

1. Do not reuse Nyloc nuts. Always replace with a new Nyloc nut.

2. Always use Loctite thread locking compound Grade 241.

3. Always use recommended components and parts available from Tendercare Ltd.

4. Do not modify or repair the frame